


The series of glass rotor flowmeter is an integrated product by cone-shaped glass tube, float, flanges. The installation is easy and the flowmeter is adjustable, the flowmeter is used in ranges such as semi-conductor chemicals etc.


- Temperature Limit: PVC ≤ 60°C, 304SS ≤ 100°C
- Accuracy: ±5%

Specifications

DN	Measure		Working pressure (Mpa)	
	Water (L/h)	Air (NL/min)	304SS	PVC
15	30-300	10-100	≤0.7	≤0.4
	60-600	20-200		
	90-900	25-250		
20	90-900	20-200		
	120-1200	30-300		
	180-1800	50-500		
25	180-1800	50-500		
	300-3000	100-1000		
	480-4800	150-1500		
32	480-4800	200-2000		
	600-6000	250-2500		
40	720-7200	300-3000	≤0.5	≤0.3
	1-10m³/h	18-180Nm³/h		
	1.2-12m³/h	20-200Nm³/h		
50	1.5-15m³/h	25-250Nm³/h		
	1.2-12m³/h	20-200Nm³/h		
	1.5-15m³/h	25-250Nm³/h		
65	1.8-18m³/h	30-300Nm³/h	≤0.3	≤0.25
	3-30m³/h	35-350Nm³/h		
	4-40m³/h	40-400Nm³/h		
80	4-40m³/h	40-400Nm³/h		
	5-50m³/h	50-500Nm³/h		
100	6-60m³/h	60-600Nm³/h		
	6-60m³/h	60-600Nm³/h		
	7-70m³/h	70-700Nm³/h		
	10-100m³/h	90-900Nm³/h		

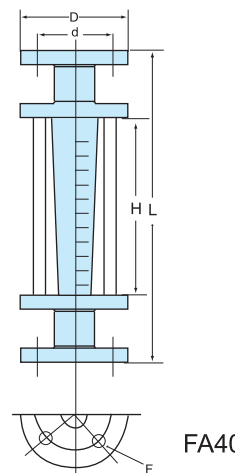

How to order

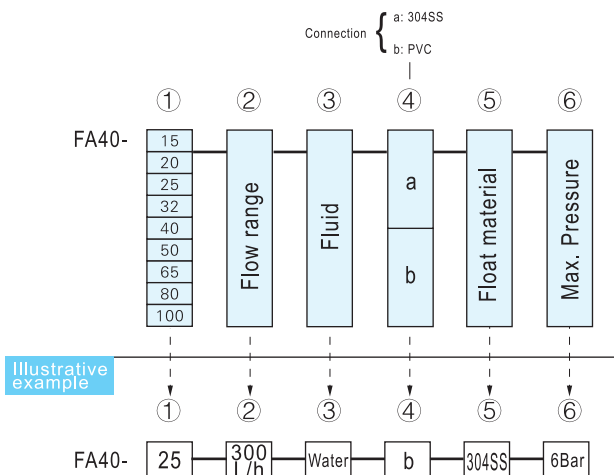

Sizes (mm)

	15	20	25	32	40	50	65	80	100
L	260	340	340	340	340	340	390	390	410
H	150	200	200	200	200	200	250	250	250
D	95	105	115	140	150	165	185	200	220
d	65	75	85	100	110	125	145	160	180
F	14	14	14	18	18	18	18	18	18
Weight (kg)	304SS	5	6	8	9	10	14	20	25
	PVC	3	3	4	6	7	9	15	22

\* Refer to "Ordering" and "Illustrative example" when placing an order or requesting a quotation. Fill in the blanks in the "Order/Quotation Request Card" at the end of the catalog, and send the card by fax.