

The main frame of the flow meter of this type is made of engineering plastics of high strength (PC Polycarbonate or PSU polysulfone), which is breaking-proof and corrosion-proof, and can be mounted in any position. It is capable of bearing high pressure, easy to read (the reading is red), and equipped with indicating device showing the upper and lower limit of the flow.

- Temperature limited: PC: 0~60°C  
PSU: 0~100°C
- Accuracy: ±6%
- Alarm switch is optional



### Z-60

| Model  | Measure Range |        |        |          | Thread                       | Weight (kg) |
|--------|---------------|--------|--------|----------|------------------------------|-------------|
|        | Water         |        | Air    |          |                              |             |
|        | GPM           | LPM    | GPM    | LPM      |                              |             |
| Z-6011 | 0.5~5         | 2~20   | 18~180 | 60~600   | 1/2" FNPT<br>or<br>3/4" MNPT | 0.4         |
| Z-6012 | 1~7           | 4~26   | 20~200 | 70~700   |                              |             |
| Z-6013 | 1~10          | 4~35   | 25~250 | 100~1000 |                              |             |
| Z-6014 | 1~16          | 5~60   | 35~350 | 150~1400 | 3/4" FNPT<br>or 1" MNPT      | 0.5         |
| Z-6015 | 3~18          | 10~65  | 52~520 | 200~2000 |                              |             |
| Z-6016 | 4~28          | 20~100 | 80~800 | 300~3000 |                              |             |

### Z-60(Alarm switch type)



| Model   | Measure Range |        |        |          | Thread                  | Weight (kg) |
|---------|---------------|--------|--------|----------|-------------------------|-------------|
|         | Water         |        | Air    |          |                         |             |
|         | GPM           | LPM    | GPM    | LPM      |                         |             |
| Z-6011A | 0.5~7         | 2~25   | 18~180 | 60~600   | 1/2" FNPT<br>3/4" MNPT  | 0.4         |
| Z-6012A | 0.5~9         | 2~35   | 20~200 | 70~700   |                         |             |
| Z-6013A | 1~13          | 3~50   | 25~250 | 100~1000 |                         |             |
| Z-6014A | 3~16          | 10~60  | 35~350 | 150~1400 | 3/4" FNPT<br>or 1" MNPT | 0.5         |
| Z-6015A | 4~22          | 15~80  | 52~520 | 200~2000 |                         |             |
| Z-6016A | 5~28          | 20~100 | 80~800 | 300~3000 |                         |             |

### Z-65

| Model  | Measure Range |        | Thread (NPT)                     |
|--------|---------------|--------|----------------------------------|
|        | Water         |        |                                  |
|        | GPM           | LPM    |                                  |
| Z-6501 | 3~25          | 12~90  | 1 1/2" Female<br>or<br>2" Female |
| Z-6502 | 5~50          | 20~200 |                                  |
| Z-6503 | 8~80          | 30~280 |                                  |
| Z-6504 | 10~100        | 40~380 |                                  |

Note: BSP is optional

## How to order

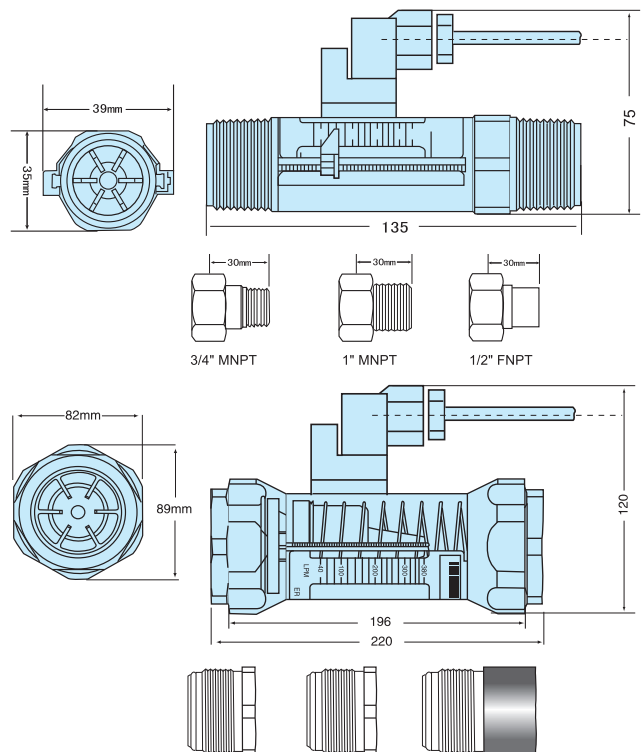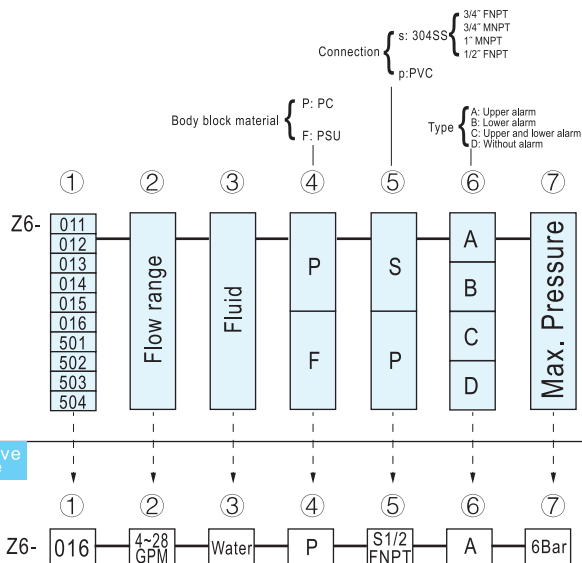

Illustrative example

\* Refer to "Ordering" and "Illustrative example" when placing an order or requesting a quotation. Fill in the blanks in the "Order/Quotation Request Card" at the end of the catalog, and send the card by fax.