


The wetted part is 304SS material. The flowmeter is used in chemical analysis apparatus, testing equipment and scientific development department, the flowmeter has small size and nice shape also it can be installed on equipment' control plate.


- Temperature limited: 60°C,
- Accuracy: ±5%
- Working pressure limited:0.6MPa

K-100

Model	Water (mL/min)	Air (NL/min)	Thread (Female)	Weight (kg)
K-1011	20-200	0.3-3	1/8"NPT *	0.5
K-1012	30-300	0.5-5	1/4" NPT	
K-1013	50-500	1-10	1/4"NPT 1/4"BSP	
K-1014	0.1-1 L/min	2-20		
K-1015	0.15-1.5 L/min	3-30		
K-1016	0.2-2 L/min	5-50		

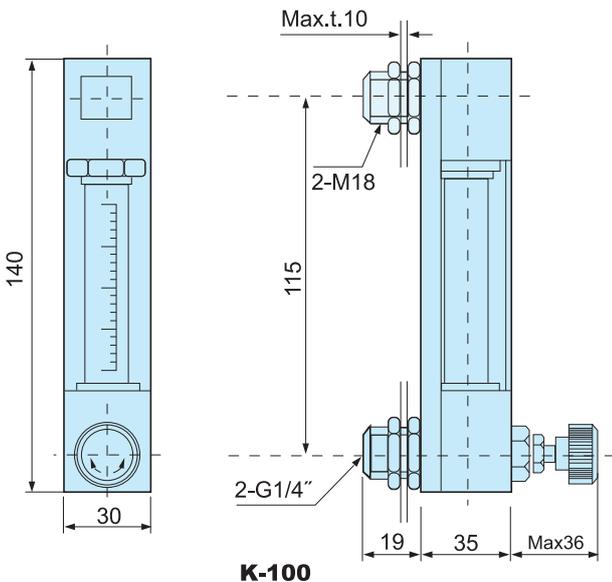

How to order

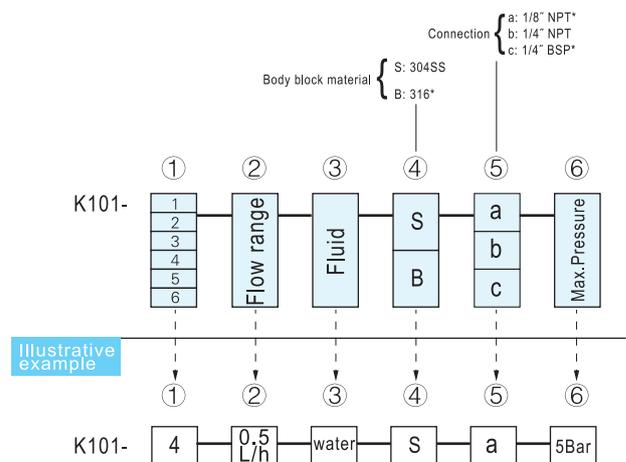

“*” Special ordering

* Refer to "Ordering" and "Illustrative example" when placing an order or requesting a quotation. Fill in the blanks in the "Order/Quotation Request Card" at the end of the catalog, and send the card by fax.